


## STRIP BLACK 224LED/M 16,5W/M 27K IP65

Code: 06879

The Black stripLED Professional line is the best choice in terms of performance, efficiency and light quality. These strips are characterized by a uniform color and high color rendering, brilliant and sharp in every context. CRI95, R9>60.

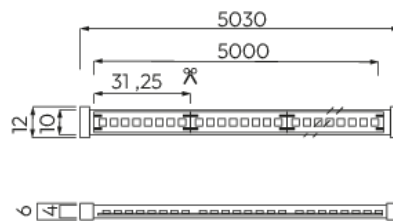

### General specifications

Commercial brand	<b>Black professional</b>
Installation environment	<b>Interior, Exterior</b>
Included mounting type	<b>3M 300 LSE biadhesive</b>
Cable output type	<b>IN/OUT</b>
Packaging	<b>Box</b>
Made in	<b>Albania</b>

### Physical specifications

IP	<b>IP65</b>
----	-------------


### Lighting specifications

N° LEDs / m	<b>224</b>
Lm / m	<b>2221</b>
W / m	<b>16.5</b>
Light type	<b>White</b>
CCT	<b>2700K</b>
CRI	<b>95</b>
R9	<b>60</b>
Chromatic tolerance (SDCM)	<b>3</b>
RG	<b>RG1</b>
Life time	<b>L90B10</b>
LB value @ h	<b>50000</b>

## Light Emission Specifications

Beam (°)	120
----------	-----

## Electrical specifications

Power supply availability	Not included
Dimmable	Yes
Dimmer availability	Not included
Power (W)	82.5
Power supply voltage type	DC
Power supply type (CC / CV)	Voltage
Input Voltage MIN-MAX (V)	24
Insulation class	III
Light source type	LEDs SMD
LED packaging	2835
Feedback (mm)	5000
Energy efficiency class	
Replaceable light source	Replaceable by skilled personnel


## Dimensions and weight

Length (mm)	5030
Width (mm)	10
Height / Thickness (mm)	4
Cable IN length (mm)	100
Cable OUT length (mm)	100
Minimum bending radius (m)	5
Module length (mm)	31.25


## General conditions

Warranty	2 years
Operating temperature (ambient)	-10°C (min) / 45°C (max)
Storage temperature	-20°C (min) / 50°C (max)

## Accessory codes



**05187**  
Closed cap for silicone sheathing 9528



**05188**

Cable entry cap for silicone sheathing 9528

---